

# Product Specification PE4309

#### **Product Description**

This product is a high linearity, 6-bit RF Digital Step Attenuator (DSA) covering a 31.5 dB attenuation range in 0.5 dB steps. The Peregrine  $50\Omega$  RF DSA provides a parallel CMOS control interface and it operates on 3-volt to 5-volt supply. It maintains high attenuation accuracy over frequency and temperature and exhibits very low insertion loss and low power consumption. This Peregrine DSA is available in a 4x4 mm 24 lead QFN footprint with an exposed ground paddle.

The PE4309 is manufactured on Peregrine's UltraCMOS™ process, a patented variation of silicon-on-insulator (SOI) technology on a sapphire substrate, offering the performance of GaAs with the economy and integration of conventional CMOS.

#### Figure 1. Functional Schematic Diagram

#### 50 Ω RF Digital Attenuator 6-bit, 31.5 dB, DC-4.0 GHz

#### **Features**

- Best in class 2.0 kV HBM ESD tolerance
- Low Insertion Loss: 1.6 dB typical
- Attenuation: 0.5 dB steps to 31.5 dB
- High Linearity: Typical 52 dB IP3
- Best in Class Attenuation accuracy
- Parallel programming interface
- Single supply, 3V to 5V operation
- Standard 3V or 5V CMOS control logic independent of supply voltage
  - Very low power consumption
- RoHS-compliant 24-lead 4x4 mm QFN

# igure 2. Package Type

Switched Attenuator Array

Parallel Control

**RF** Input

# Control Logic Interface

#### Table 1. Electrical Specifications @ +25°C, V pp = 3.0. V - 5.0. V

Parameter	Test Conditions <sup>4</sup>	Frequency	Min	Тур	Maximum	Units
Operation Frequency			DC		4000	MHz
Insertion Loss		DC - 2.2 GHz 2.2 - 4.0 GHz	-	1.6 2.2	2 3.4	dB dB
Attenuation Accuracy	Any-Bit or Bit Combination Any Bit or Bit Combination 0.5 - 7.5 dB States <sup>3</sup> 8.0 - 15.5 dB States <sup>3</sup> 16.0 - 31.5 dB States <sup>3</sup>	DC +1.0 GHz 10 < 2.2 GHz 2.1 < 8 GHz 2.2 < 8 GHz 2.2 < 8 GHz 2.2 < 3.0 GHz		- 0.15 0.7 1.2	±(0.10 + 3% of atten setting), not to exceed +0.20 dB ±(0.15 + 3% of atten setting) - - -	dB dB dB dB dB
1 dB Compression <sup>2</sup>		1 MHz - 2.2 GHz 2.2 - 4.0 GHz	30 -	32 32	-	dBm dBm
Input IP3 <sup>1</sup>	Two-tone inputs +18 dBm	1 MHz - 2.2 GHz 2.2 - 4.0 GHz	-	52 45	-	dBm dBm
Return Loss		DC - 2.2 GHz 2.2 - 4.0 GHz	15 10	20 20	-	dB dB
Switching Speed	50% of control voltage to 90% onlinal attenuation level		-	-	1	μS

Notes: 1. Device Linearity will begin to degrade below 5 MHz.


2. Note Absolute Maximum in Table 4.

See Figures 12 and 13 for typical attenuation error.

Newsurements made in a 50 ohm system (see Figure 4, Test Circuit Block Diagram). Resistors (R2, R3, R5, R6, R7) with a value of 10K-ohm are used to decouple the RF path from the control inputs.



#### Figure 3. Pin Configuration (Top View)



#### Table 2. Pin Descriptions

Pin No.	Pin Name	Description	
1	N/C <sup>7</sup>	No Connect	
2	V <sub>DD</sub>	Power supply pin	
3	N/C <sup>5</sup>	No Connect	
4	RF1	RF port	•
5	N/C <sup>5</sup>	No Connect	
6	ACG <sup>6</sup>	AC Ground connection	
7	ACG <sup>6</sup>	AC Ground connection	
8	ACG <sup>6</sup>	AC Ground connection	
9	ACG <sup>6</sup>	AC Ground connection	
10	ACG <sup>6</sup>	AC Ground connection	
11	ACG <sup>6</sup>	AC Ground connection	
12	N/C <sup>7</sup>	No Connect	
13	ACG <sup>6</sup>	AC Ground connection	
14	N/C <sup>5</sup>	No Connect	
15	RF2	REport	
16	N/C <sup>5</sup>	No Connect	
17	N/C <sup>5</sup>	No Connect	
18	N/C <sup>5</sup>	No Connect	
19	C16	Attenuation control bit, 16 dB	
20	C8	Attenuation control bit, 8 dB	
21	C4	Attenuation control bit, 4 dB	
22	C2	Attenuation control bit, 2 dB	
23	C1	Attenuation control bit, 1 dB	
24	C0.5	Attenuation control bit, 0.5 dB	
Paddle	GND	Ground for proper operation	

Notes: 5. For improved RF performance these No Connect pins can be connected to RF ground.

- 6. Pins can either be grounded directly or through coupling capacitor
- 7. Pin can either be grounded or No Connect

# Exposed Solder Pad Connection

The exposed solder pad on the bottom of the package must be grounded for proper device operation.

©2007 Peregrine Semiconductor Corp. All rights reserved.

#### **Table 3. Operating Ranges**

Parameter	Min	Тур	Max	Units
$V_{DD}$ Power Supply Voltage	3.0	3.3	5.5	V
IDD Power Supply Current		100	250	μA
P <sub>IN</sub> Input power (50Ω)			+24	dBm

#### Table 4. Absolute Maximum Ratings

Symbol	Parameter/Conditions	Min	Max	Units
V <sub>DD</sub>	Power supply voltage	-0.3	6.0	V
Vı	Voltage on any DC input	-0.3	6.0	V
T <sub>ST</sub>	Storage temperature range	-65	150	°C
T <sub>OP</sub>	Operating temperature Tange	-40	85	°C
P <sub>ℕ</sub>	Input power (50Ω)		30	dBm
Vest	ESD voltage (Human Body Model)	N	2000	V

# Electrostatic Discharge (ESD) Precautions

When handling this UltraCMOS<sup>TM</sup> device, observe the same precautions that you would use with other ESD-sensitive devices. Although this device contains circuitry to protect it from damage due to ESD, precadtions should be taken to avoid exceeding the rate specified in Table 4.

#### Latch-Up Avoidance

Unlike conventional CMOS devices, UltraCMOS™ devices are immune to latch-up.

#### Switching Frequency

The PE4309 has a maximum 25 kHz switching rate.

#### Table 5. Control Voltage

State	Bias Condition		
Low	0 to +1.0 Vdc at 2 μA (typ)		
High	+2.0 to +5 Vdc at 10 μA (typ)		

The standard 3V or 5V CMOS control logic is independent of supply voltage.

#### Table 6. Truth Table


C16	C8	C4	C2	C1	C0.5	Attenuation State
1	1	1	1	1	1	Reference Loss (IL)
1	1	1	1	1	0	0.5 dB
1	1	1	1	0	1	1 dB
1	1	1	0	1	1	2 dB
1	1	0	1	1	1	4 dB
1	0	1	1	1	1	8 dB
0	1	1	1	1	1	16 dB
0	0	0	0	0	0	31.5 dB

Document No. 70-0218-07 | UltraCMOS™ RFIC Solutions



# Figure 4. Test Circuit Block Diagram

Peregrine Specification 102-0371

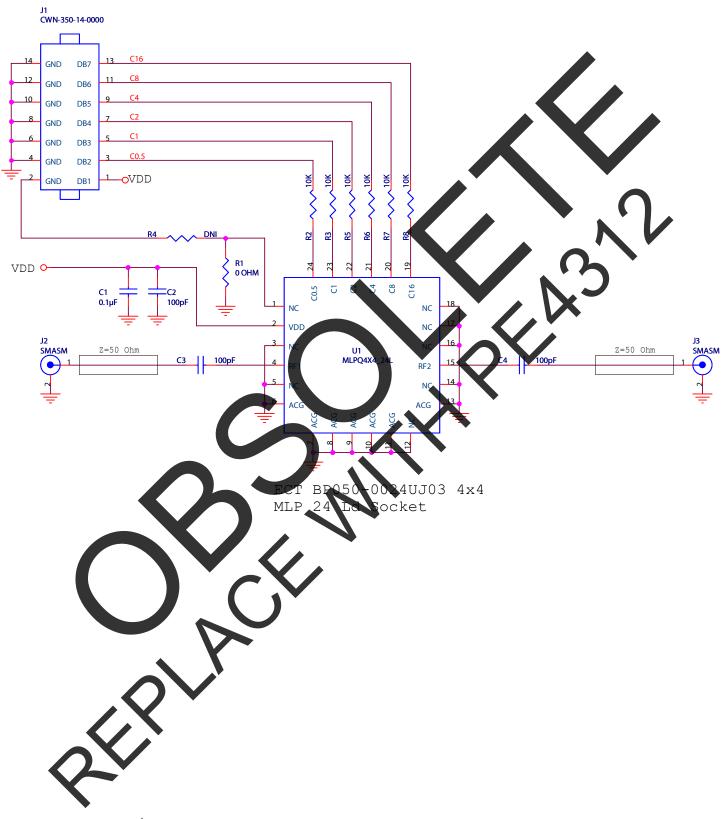



#### **Evaluation Kit**

The Digital Attenuator Evaluation Kit board was designed to ease customer evaluation of the PE4309 Digital Step Attenuator. Connect J2 by mini clip to Vdd to power the IC. Connect J8 by mini clip to power the evaluation board support circuits. The control bits for the six parallel data inputs (C0.5 to C16) are controlled using S2-S7 to select bits or bit combinations. This allows any attenuation setting to be specified as shown in Table 6.

The de-embed trace (J6 to J7) estimates the PCB insertion loss for removal from the evaluation board measurement data.

To evaluate using customer software, J1 can be installed using a standard 0.100 IDC header (some circuit modification required, see schematic).

The ability to supply different voltages for the Control circuitry (using J8) and IC Vdd (using circuits allows for evaluation of circuits using different control vs. supply voltages.

#### Figure 5. Evaluation Board Layout

38 33

Peregrine Specification 101/0299


Figure 6. Evaluation Board Schematic egrine Specification 102/0366 J8 HEADER 2 **S**3 86 8 2 8 5 20.5 N RF: N ACC S ©2007 Peregrine Semiconductor Corp. All rights reserved. Document No. 70-0218-07 | UltraCMOS<sup>™</sup> RFIC Solutions



#### Typical Performance Data



Figure 8. Attenuation at Major Steps

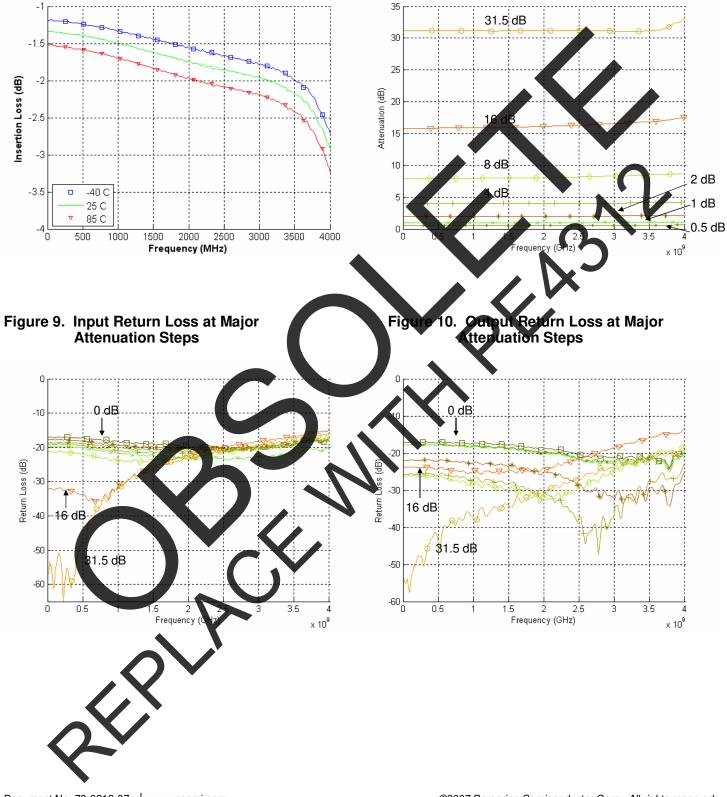


Document No. 70-0218-07 | www.psemi.com




#### **Typical Performance Data**

#### Figure 11. Attenuation Error Vs. Frequency

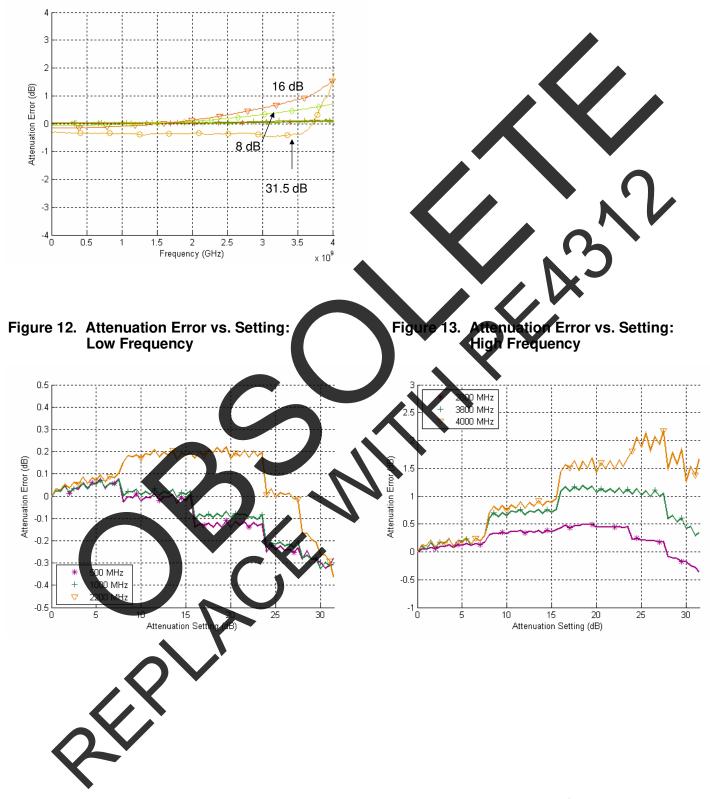




#### Figure 16. Package Drawing

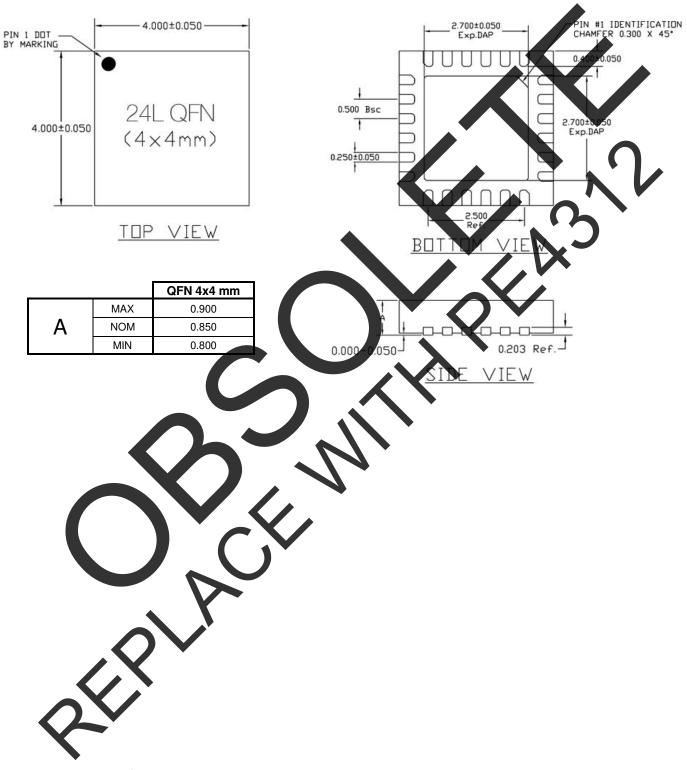

Document No. 70-0218-07 | www.psemi.com



#### Figure 17. Tape and Reel Drawing

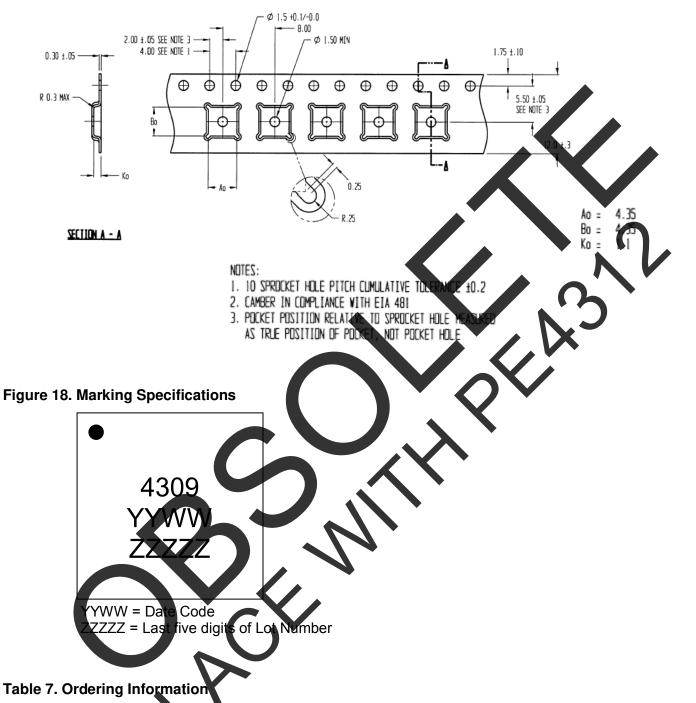

Order Code	Part Marking	Description	Package	Shipping Method
4309-00	RE4309-EK	PE4309-24QFN 4x4mm-EK	Evaluation Kit	1 / Box
4309-51	4309	PE4309G-24QFN 4x4mm-75A	Green 24-lead 4x4mm QFN	75 units / Tube
4309-52	4309	PE4309G-24QFN 4x4mm-3000C	Green 24-lead 4x4mm QFN	3000 units / T&R



#### Sales Offices

#### The Americas

#### **Peregrine Semiconductor Corporation**

9380 Carroll Park Drive San Diego, CA 92121 Tel: 858-731-9400 Fax: 858-731-9499

#### Europe

#### Peregrine Semiconductor Europe

Bâtiment Maine 13-15 rue des Quatre Vents F-92380 Garches, France Tel: +33-1-4741-9173 Fax : +33-1-4741-9173

#### Space and Defense Products

#### Americas:

Tel: 858-731-9453

#### Europe, Asia Pacific:

180 Rue Jean de Guiramand 13852 Aix-En-Provence Cedex 3, France Tel: +33-4-4239-3361 Fax: +33-4-4239-7227

#### Peregrine Semiconductor, Asia Pacific (APAC)

Shanghai, 200040, P.R. China Tel: +86-21-5836-8276 Fax: +86-21-5836-7652

#### Peregrine Semiconductor, Kore

#B-2607, Kolon Tripolis, 210 Geumgok-dong, Bundang-gu, Seongnam-si Gyeonggi-do, 463-943 South Korea Tel: +82-31-728-3939 Fax: +82-31-728-3940

#### Peregrine Semiconductor K.K., Japan

Teikoku Hotel Tower 10B-6 1-1-1 Uchisaiwai-oho, Chiyoda-ku Tokyo 100-0011 Japan Tel: +81-3-3502-5211 Fax: +81-3-3502-5213

For a list of representatives in your area, please refer to our Web site at: www.psemi.com

## Data Sheet Identification

#### Advance Information

The product is in a formative or design stage. The data sheet contains design target specifications for product development. Specifications and features may change in any manner without notice.

#### Preliminary Specificatio

The data sheet contains preliminary data. Additional data may be added at a later date. Peregnine reserves the right to change specifications at any time without notice in order to supply the best possible product.

## Product Specification

The data sheet contains final data. In the event Peregrine decides to change the specifications, Peregrine will notify customere of the intended changes by issuing a DCN (Document Change Notice).

The information in this data sheet is believed to be reliable. However, Peregrine assumes no liability for the use of this information. Use shall be entirely at the user's own risk.

No patent rights or licenses to any circuits described in this data sheet are implied or granted to any third party.

Peregrine's products are not designed or intended for use in devices or systems intended for surgical implant, or in other applications intended to support or sustain life, or in any application in which the failure of the Peregrine product could create a situation in which personal injury or death might occur. Peregrine assumes no liability for damages, including consequential or incidental damages, arising out of the use of its products in such applications.

The Peregrine name, logo, and UTSi are registered trademarks and UltraCMOS, HaRP and MultiSwitch are trademarks of Peregrine Semiconductor Corp.

Document No. 70-0218-07 | www.psemi.com